



HEAD-2-HEAD COMPARISON



SM-27T


Stavatti
 Contact Stavatti
 2
 1 x PW150
 4,000
 53
 38.5
 12.92
 354
 30,000
 15,400
 8,000
 5,000
 8
 1 x 30mm GAU-13/A
 407
 365
 76
 4,275
 45,000
 870
 2,534
 3,800
 84.7
 7.50
 7.5
 1,995
 480

VS

Manufacturer
First Flight
Crew
Powerplant(s)
Power (shp)
Span (ft)
Length (ft)
Height (ft)
Wing Area (sq ft)
MTOW (lbs)
Empty Weight (lbs)
External Warload (lbs)
Internal Fuel (lbs)
Stores Stations (No.)
Internal Gun
Max Speed @ALT (Ktas)
Max Cruise @ALT (Ktas)
Stall Speed @ SL (ktas)
Max Climb Rate (ft/Min)
Service Ceiling (ft)
Tactical Radius, Internal Fuel (nm)
Max Range, Internal Fuel (nm)
Ferry Range, External Tanks (nm)
Wing Loading (lbs/sq ft)
Power Loading (lb/hp)
Load Limits (g)
Takeoff Distance (ft)
Landing Distance (ft)

AT-6B

Beech
 2000
 2
 1 x PT6A-68
 1,100
 33.4
 33.3
 10.7
 175.3
 6,500
 4,709
 3,120
 1,163
 6
 None
 316
 230
 74
 4,500
 35,000
 400+
 900
 NA
 37.1
 5.91
 7.5
 1,775
 1,900

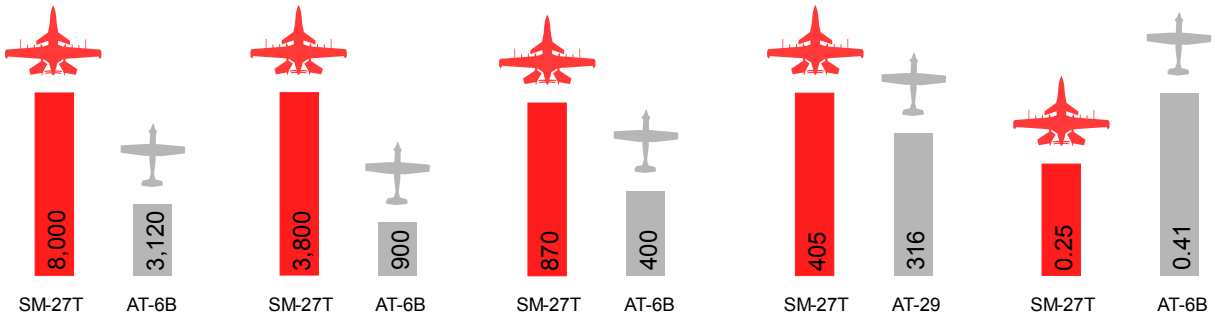

Max Warload (lbs)¹
 Max Range (nm)²
 Tactical Radius (nm)¹
 Max Speed (KTAS)³
 Relative Fuel Burn⁴

1: With Max Internal Fuel 2: With External Fuel 3: Aircraft in Clean Configuration 4: Fuel Consumed (lbs) to move 1,000 lbs of Warload 1 nm